


- Utilized for Blake 8 Cardiac SICU transports
- Touch screen
- Compatible brick with OR monitor
- Integrated AC/DC power supply unit and it supports two detachable lithium ion batteries









- 1. Alarm light
- 2. Power on/standby button
- 3. Power indicators
- 4. Ventilation holes
- 5. Ambient light detector lens
- 6. Audio alarm paused/off area (blue)
- 7. Alarm light area (blue, yellow, or red)
- 8. Mains voltage indicator the green LED is lit when the patient monitor is commented to AC mains
- 9. Battery use indicator the green light is lit when the patient monitor is operating on battery power
- 10. Battery charging/failure indicator the orange LED is lit when the patient monitor battery is charging and flashing in case of battery failure or missing battery




Opening Screen:



Select "Load PDM Data":




Zeroing Invasive Pressures:

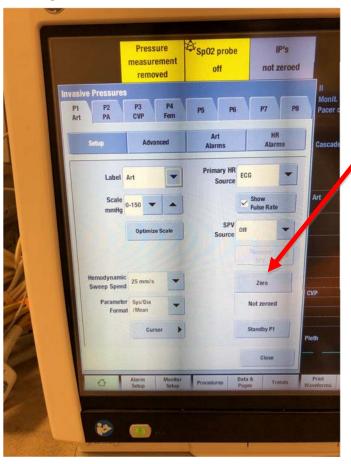


 Press the desired invasive pressure on the right side of the monitor's screen. Then press "Zero".

or

Press "Zero All Pressures" tab.

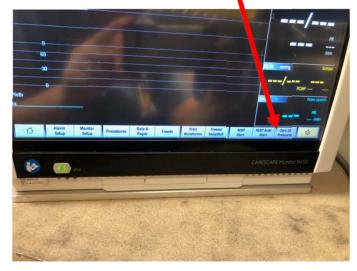


Alarm Silence:

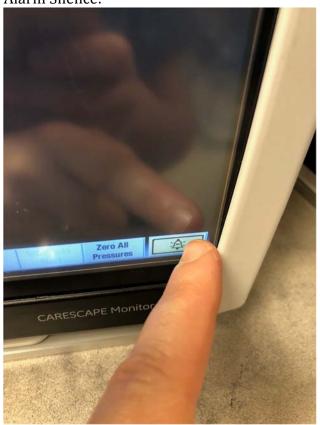




Powering On/Off:

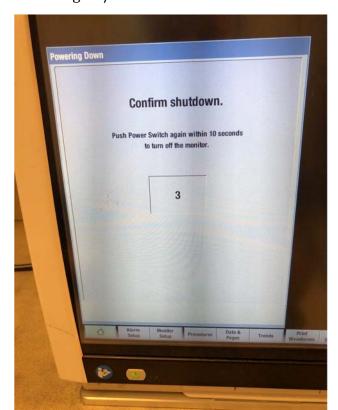


- Powering On: The monitor takes over a minute to turn on.
- Powering Off: The monitor requires pushing the power button twice.

Home Screen Tabs:


Alarm Setup

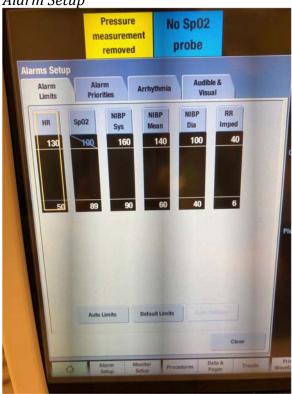


Procedures

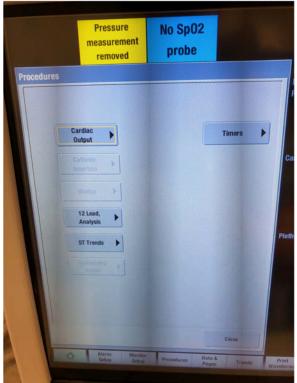


Monitor Setup

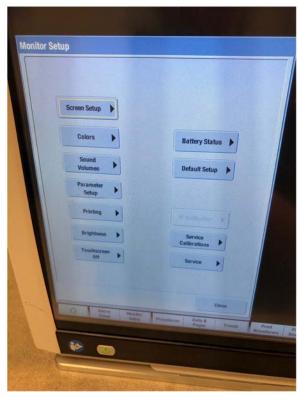

Data & Pages

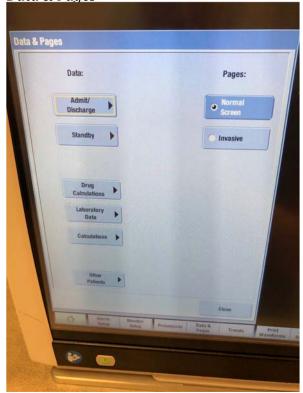

Procedures

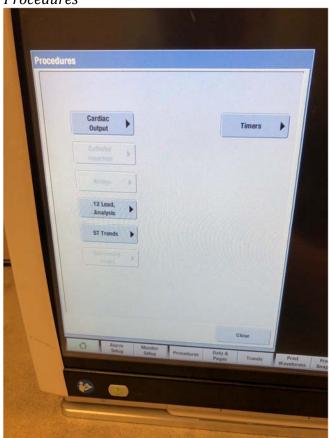

Trends

